




型号 (Model)
C2-1510




1. 材质与表面处理:
不锈钢 316 或 304
2. 性能参数:
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 4mm
防护等级: IP65
- 3 安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-5mm

1. Material and surface treatment:
Stainless steel 316 or 304
2. Performance parameters:
Unlocking torque: less than or equal to 0.79 N/M
Ultimate load: 700N
Tension and expansion: 4mm
Protection grade: IP65
- 3 installation instructions:
Torque of fixing screw is 8N.M
Torque of fixing nut is 17N.M
Applicable thickness of door panel: 1-5mm

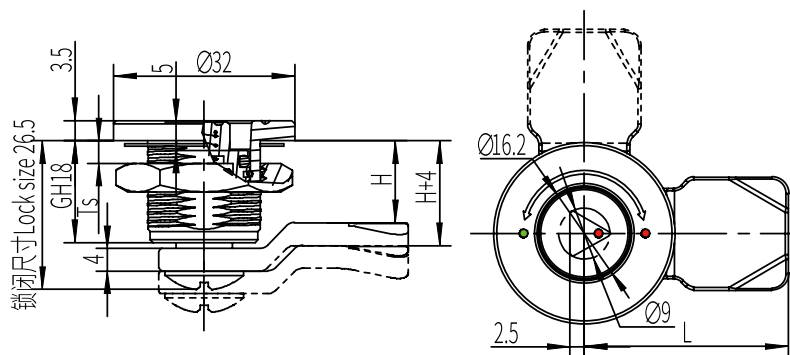

锁芯 Lock cylinder




非标定制锁芯见 P003-004
Non-standard custom lock cylinders refer to P003-004


选型 Selection

锁芯类型 Lock type	左 Left		右 Right	
	拉丝 Wire-drawing	喷砂 Sandblast	拉丝 Wire-drawing	喷砂 Sandblast
三角 Triangle 7mm	C2-1510L-237-S3	C2-1510L-237-S4	C2-1510R-237-S3	C2-1510R-237-S4
四方 Square 7mm	C2-1510L-247-S3	C2-1510L-247-S4	C2-1510R-247-S3	C2-1510R-247-S4



安装 Installation

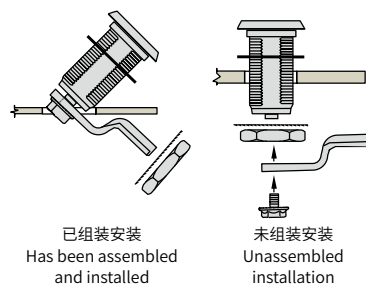

开孔 Cut out



旋转 Whirl



锁片参考 P200~203 Lock plate refer to P200~203.

