





型号 (Model)
C2-1517

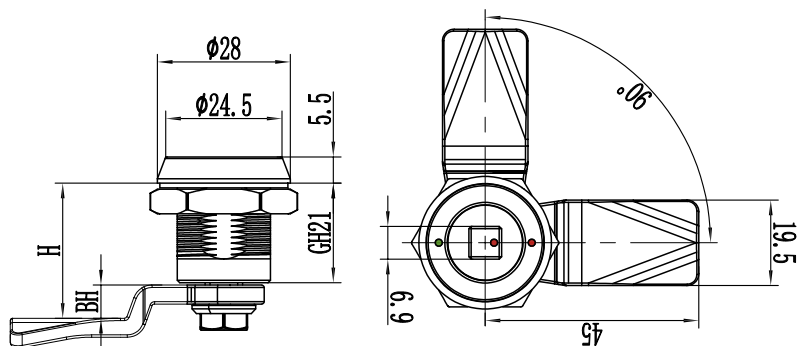

锁芯 Lock cylinder



非标定制锁芯见 P003-004
Non-standard custom lock cylinders refer to P003-004

选型 Selection

锁芯选型
Lock cylinder selection

C2-1517-SX-LH-A1L


A1 代表 304 A2 代表 316
L 代表左锁 顺时针旋转锁紧
R 代表右锁 逆时针旋转锁紧
A1 stands for 304 A2 stands for 316
L stands for left lock, turn clockwise to lock
R stands for right lock, rotate counterclockwise to lock

L 代表锁舌中心距离 H 代表有效锁闭高度
L represents the center distance of the bolt
H represents the effective locking height


1. 材质与表面处理:
不锈钢 316 或 304
2. 性能参数:
镜面抛光
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 5mm
防护等级: IP65
- 3 安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-5mm

1. Material and surface treatment:
Stainless steel 316 or 304
2. Performance parameters:
Mirror polishing
Unlocking torque: less than or equal to 0.79 N/M
Ultimate load: 700N
Tension and expansion: 5mm
Protection grade: IP65
- 3 installation instructions:
Torque of fixing screw is 8N.M
Torque of fixing nut is 17N.M
Applicable thickness of door panel: 1-5mm



安装 Installation

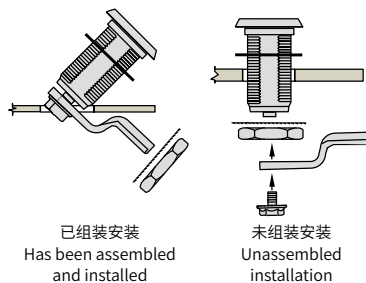

开孔 Cut out



旋转 Whirl



锁片参考 P200~203 Lock plate refer to P200~203.

