





型号 (Model)

**C2-1523
(MS816-4B)**



1. 材质与表面处理
不锈钢 316 或 304
2. 性能参数:
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 7mm
防护等级: IP65
3. 安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-15mm

1. Material and surface treatment:
Stainless steel 316 or 304
2. Performance parameters:
Unlocking torque: less than or equal to 0.79N/M
Limit load: 700N
Tightening and expansion: 7mm
Protection level: IP65
3. Installation instructions:
Fixing screw torque 8N.M
Fixing nut torque 17N.M
Applicable door thickness: 1-15mm

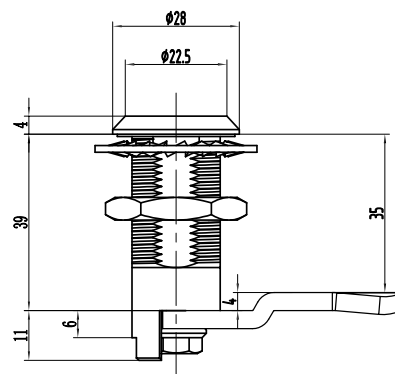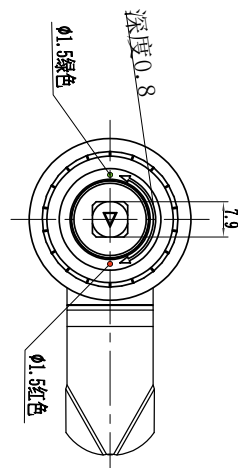

锁芯 Lock cylinder



238




348

非标定制锁芯见 P003-004
Non-standard custom lock cylinders refer to P003-004


选型 Selection

锁芯选型 Lock type	左开 Left open	右开 Right open
四方 Square 8mm	C2-1523-348L	C2-1523-348R
三角 Triangle 8mm	C2-1523-238L	C2-1523-238R

安装 Installation

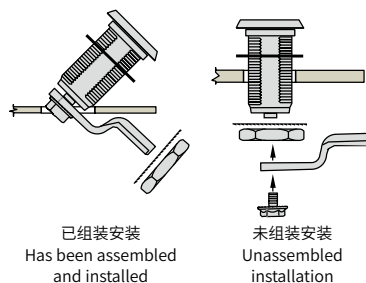

开孔 Cut out



旋转 Whirl



顺时针锁紧
Clockwise locking



逆时针锁紧
Locking counterclockwise



防水盖参考 P204 Waterproof cover P204.

