





型号 (Model)
C2-1555

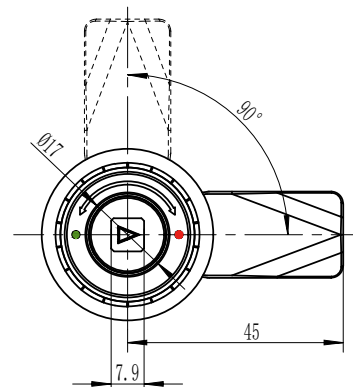

锁芯 Lock cylinder

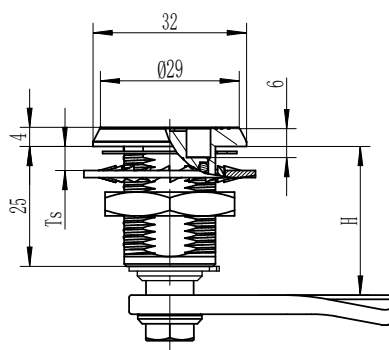

238



348

非标定制锁芯见 P003-004
Non-standard custom lock cylinders refer to P003-004


选型 Selection

锁芯类型 Lock type	锁芯代号 Lock code	左开 Left open	右开 Right open
四方 Square 8mm	348	C2-1555-348L	C2-1555-348R
三角 Triangle 8mm	238	C2-1555-238L	C2-1555-238R


1. 材质与表面处理:
不锈钢 316 或 304
2. 性能参数:
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 7mm
防护等级: IP65
3. 安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-15mm

1. Material and surface treatment:
Stainless steel 316 or 304
2. Performance parameters:
Unlocking torque: less than or equal to 0.79 N/M
Ultimate load: 700N
Tension and expansion: 7mm.
Protection grade: IP65
3. Installation instructions:
Torque of fixing screw is 8N.M
Torque of fixing nut is 17N.M
Applicable thickness of door panel: 1-15mm

安装 Installation




已组装安装
Has been assembled
and installed



未组装安装
Unassembled
installation

开孔 Cut out




旋转 Whirl



顺时针锁紧
Clockwise locking



逆时针锁紧
Locking counterclockwise



锁片参考 P200~203 Lock plate refer to P200~203.