



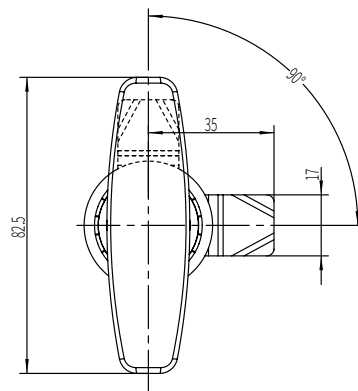

型号 (Model)

C8-1564

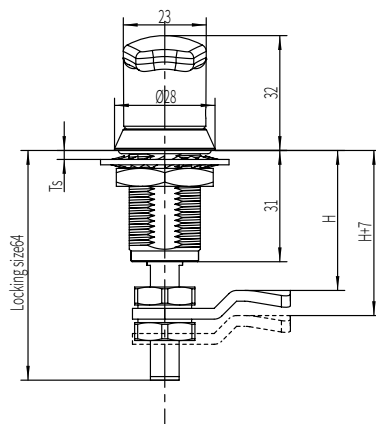

选型 Selection

锁芯选型
Lock cylinder selection

C8-1564-SX-LH-A1L

A1 代表 304 A2 代表 316
L 代表左锁 顺时针旋转锁紧
R 代表右锁 逆时针旋转锁紧
A1 stands for 304 A2 stands for 316
L stands for left lock, turn clockwise to lock
R stands for right lock, rotate counterclockwise to lock

L 代表锁舌中心距离 H 代表有效锁闭高度
L represents the center distance of the bolt
H represents the effective locking height

1. 材质与表面处理

不锈钢 304

2. 性能参数

解锁扭矩小于等于 0.79N/M

极限载荷 700N

拉紧伸缩量 7mm

防护等级 IP65

3. 安装说明

固定螺丝扭矩 8N.M

固定螺母扭矩 17N.M

适用门板厚度 1-15mm

1. Material and surface treatment

Stainless steel 304

2. Performance parameters

Unlocking torque less than or equal to 0.79N/M

Limit load 700N

Tightening and expansion 7mm

Protection level IP65


3. Installation instructions

Fixing screw torque 8N.M

Fixing nut torque 17N.M


Applicable door thickness: 1-15mm

安装 Installation

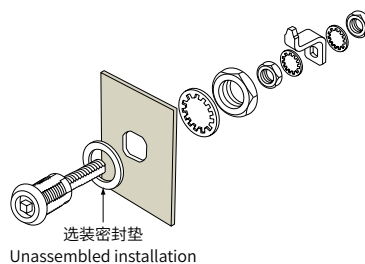

选装密封垫
Unassembled installation

开孔 Cut out




旋转 Whirl



顺时针锁紧
Clockwise locking



逆时针锁紧
Locking counterclockwise



锁片参考 P200~203 Lock plate refer to P200~203.

