







型号 (Model)
C3-1617
(三角、四方)

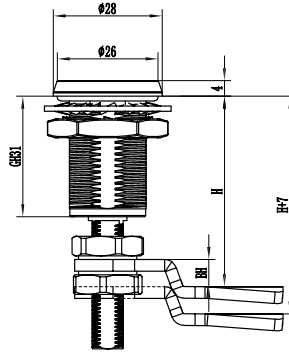

可调节款
Adjustable compression height



不可调节款
Non-adjustable compression height



选型 Selection

锁芯类型 Lock type	锁芯代号 Lock code	不可调节款 Non-adjustable compression height		可调节款 Adjustable compression height	
		左开 Left open	右开 Right open	左开 Left open	右开 Right open
三角 Triangle 7mm	237	C3-1617-237-NB-L	C3-1617-237-NB-R	C3-1617-237-WB-L	C3-1617-237-WB-R
三角 Triangle 8mm	238	C3-1617-238-NB-L	C3-1617-238-NB-R	C3-1617-238-WB-L	C3-1617-238-WB-R
四方 Square 7mm	247	C3-1617-247-NB-L	C3-1617-247-NB-R	C3-1617-247-WB-L	C3-1617-247-WB-R
四方 Square 8mm	248	C3-1617-248-NB-L	C3-1617-248-NB-R	C3-1617-248-WB-L	C3-1617-248-WB-R

旋转 Whirl




顺时针锁紧
Clockwise locking



逆时针锁紧
Locking counterclockwise

开孔 Cut out




1. 材质与表面处理:
不锈钢 316 或 304
2. 性能参数:
解锁扭矩: 小于等于 0.79N/M
极限载荷: 700N
拉紧伸缩量: 7mm
防护等级: IP65
3. 安装说明:
固定螺丝扭矩 8N.M
固定螺母扭矩 17N.M
适用门板厚度: 1-15mm

1. Material and surface treatment:
Stainless steel 316 or 304
2. Performance parameters:
Unlock torque: less than or equal to 0.79N/M
Ultimate load: 700N
Stretching amount: 7mm
Protection level: IP65
3. Installation instructions:
Fixing screw torque 8N.M
Fixing nut torque 17N.M
Applicable door thickness: 1-15mm



防水盖参考 P204



锁片参考 P200~203

Waterproof cover P204.

Lock plate refer to P200~203.

