



型号 (Model)

C4 不锈钢系列



1. 材质与表面处理:

不锈钢 316 或 304

2. 性能参数:

解锁扭矩: 小于等于 0.79N/M

极限载荷: 200N

拉紧伸缩量: 4.5mm

防护等级: IP65

3. 安装说明:

固定螺丝扭矩 6N.M

固定螺母扭矩 9N.M

适用门板厚度: 1-3mm

1. Material and surface treatment:

Stainless steel 316 or 304

2. Performance parameters:

Unlocking torque: less than or equal to 0.79N/M

Limit load: 200N

Tightening and expansion: 4.5mm





Protection level: IP65

3. Installation instructions:

Fixing screw torque 6N.M

Fixing nut torque 9N.M

Applicable door thickness: 1-3mm

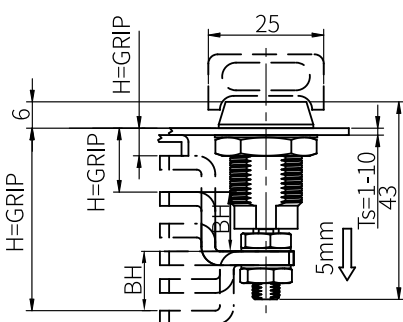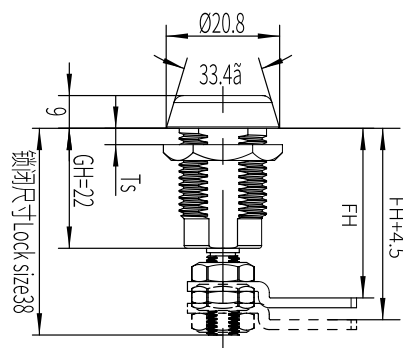


注解: FH 平锁舌最小 28, 可调值 S3mm

Note: FH flat bolt has a minimum of 28 and an adjustable value of S3mm

选型 Selection


锁头类型 Lock type	
工具操纵型 Tool manipulation type	把手型 Handle type
C4-1404S	C4-1405S

安装 Installation

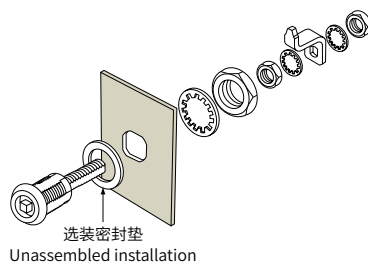

选装密封垫
Unassembled installation


开孔 Cut out



旋转 Whirl



顺时针锁紧
Clockwise locking



锁片参考 P200~203 Lock plate refer to P200~203.