

型号 (Model)

LS102



1. 材质与表面处理: ABS 塑料, 黑色
2. 性能详述: 提起 / 拉出 1300N

1. Material and surface treatment: ABS plastic, black
2. Performance details: lift/pull out 1300N



推出 / 滑动: 450N
Push/Slide: 450N

阻燃等级: UL94-HB 或 UL94-V0


工作温度范围: -50°C 到 60°C

Flame retardant grade: UL94-HB or UL94-V0


Operating temperature range: -50° C to 60° C

附注: 性能详细资料来自安装于 1.2mm 以上厚度的钢门。
最大载荷受门板强度限制。


Note: The detailed performance information comes from the steel door installed in the thickness of 1.2mm or more. The maximum load is limited by the strength of the door panel.

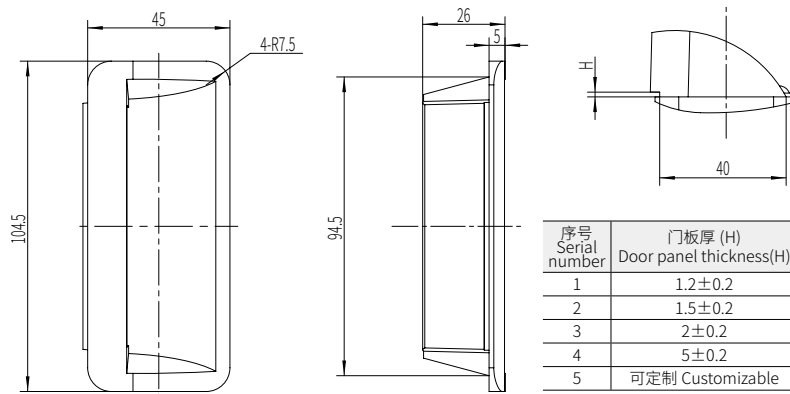



安装 Install



开孔 Perforation

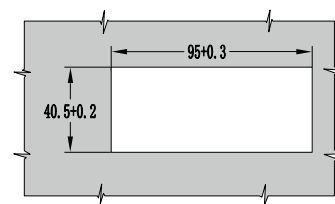

型号 (Model)
LS102 老型 (小)

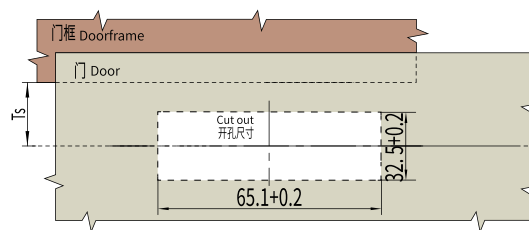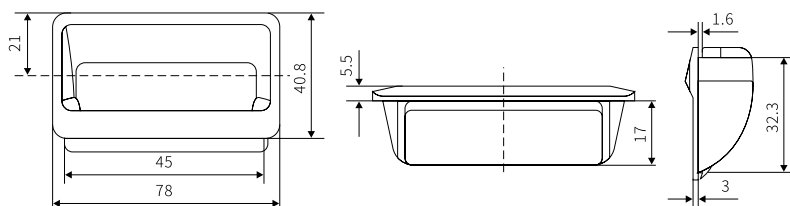

1. 材质: ABS 塑料
2. 表面处理或颜色: 黑色、灰色
3. 适用门板厚度: 1.2~1.6mm
4. 备注: 可定制颜色和阻燃级别

1. Material: ABS plastic
2. Surface treatment or color: black, gray
3. Applicable door thickness: 1.2~1.6mm
4. Remarks: Color and flame retardant grade can be customized