



型号 (Model)

**LS108**




推出 / 滑动: 450N  
Push/Slide: 450N



安装说明:  
提供固定螺钉。门板厚度小于每个范围内的最小值时, 拉手容许有一定活动量。固定螺钉的最大力矩为 0.5N·m

Installation Notes: Provide fixing screws. When the thickness of the door panel is less than the minimum value in each range, the handle allows a certain amount of movement. The maximum torque of the fixing screw is 0.5N·m.

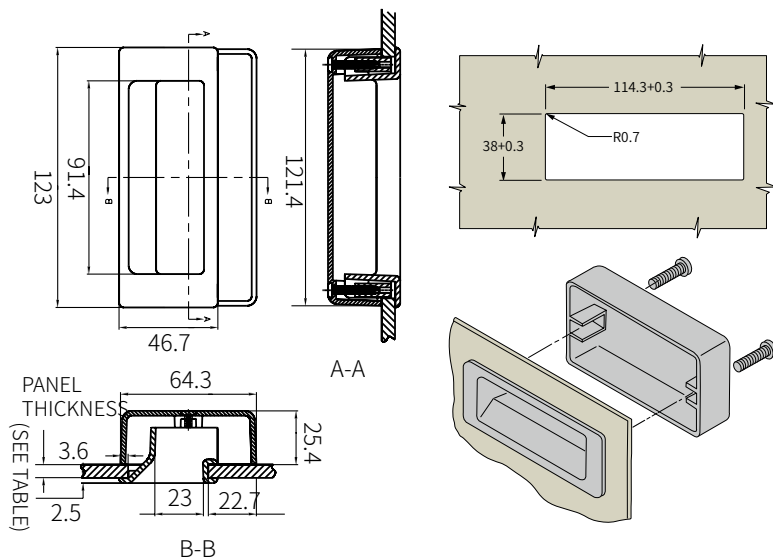

1. 材质与表面处理  
拉手和罩壳: ABS 塑料, 黑色  
螺钉: 钢, 镀锌  
提起 / 拉出: 1300N

1. Material and surface treatment  
Handle and cover: ABS plastic, black  
Screw: steel, galvanized  
Lift/pull out: 1300N




不锈钢  
Stainless Steel



锌合金  
Zinc alloy

型号 (Model)

**LS122**

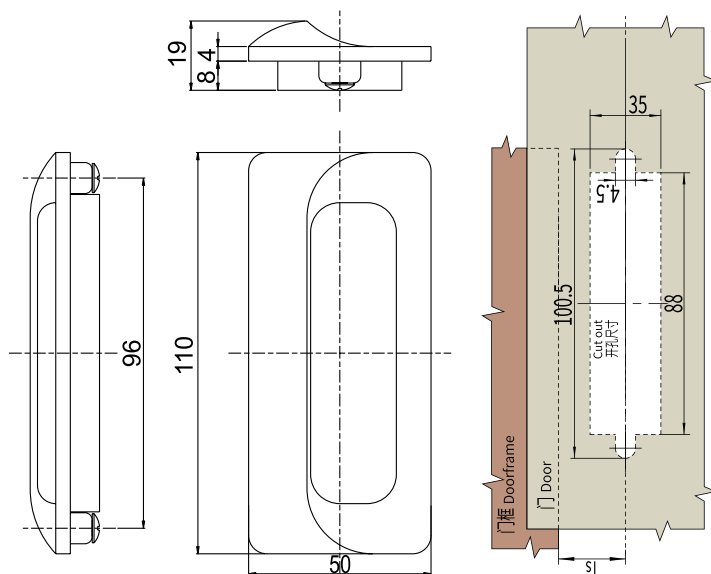

1. 材质: 锌合金、ABS 塑料、304 不锈钢  
2. 表面处理或颜色: 电镀亮铬、纳米亚光漆、喷塑黑  
3. 适用门板厚度: 1~3mm

1. Material: zinc alloy, ABS plastic, 304 stainless steel  
2. Surface treatment: electroplating bright chrome, nano matt paint, spray black  
3. Applicable door thickness: 1~3mm