




型号 (Model)

C1-1506

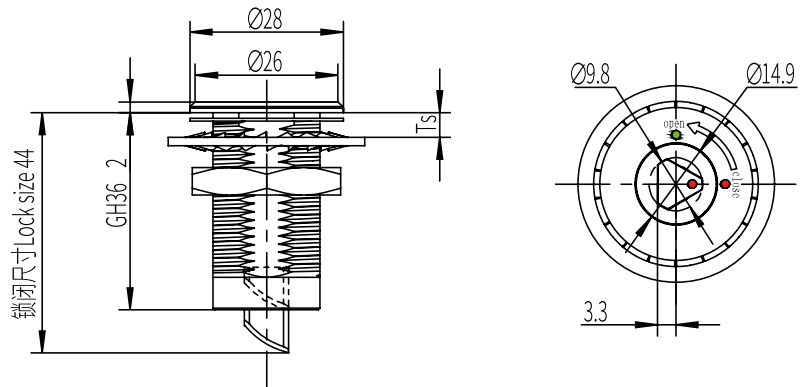

锁芯 Lock cylinder



248



238

非标定制锁芯见 P003-004

Non-standard custom lock cylinders refer to P003-004

选型 Selection

锁芯选型
Lock cylinder selection

C1-1506-SX-A1L

A1 代表 304 A2 代表 316
L 代表左锁 顺时针旋转锁紧
R 代表右锁 逆时针旋转锁紧
A1 stands for 304 A2 stands for 316
L stands for left lock, turn clockwise to lock
R stands for right lock, rotate counterclockwise to lock

1. 材质与表面处理:

不锈钢 316 或 304

镜面抛光

2. 性能参数:

解锁扭矩: 小于等于 0.79N/M

极限载荷: 700N

拉紧伸缩量: 8.8mm

防护等级: IP54

3. 安装说明:

固定螺母扭矩 17N.M

适用门板厚度: 1-15mm

1. Material and surface treatment:

Stainless steel 316 or 304

Mirror reflection

2. Performance parameters:

Unlocking torque: less than or equal to 0.79 N/M

Ultimate load: 700N

Tension and expansion: 8.8mm


Protection grade: IP54

3. Installation instructions:

Torque of fixing nut is 17N.M

Applicable thickness of door panel: 1-15mm

开孔 Cut out

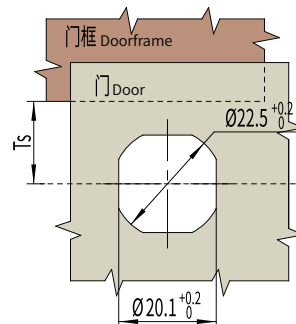

旋转 Whirl



顺时针锁紧
Clockwise locking



防水盖参考 P204 Waterproof cover P204.