
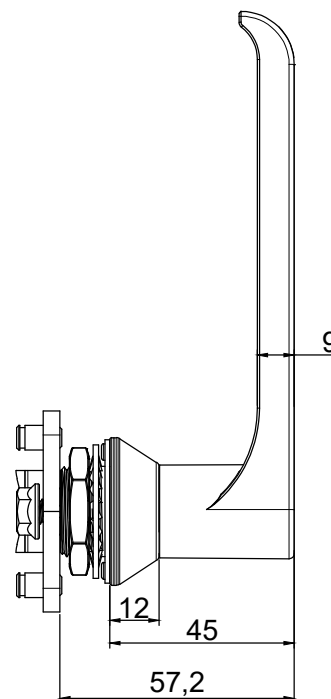
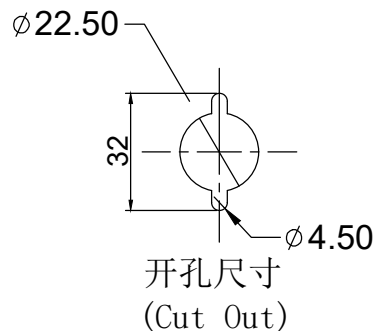
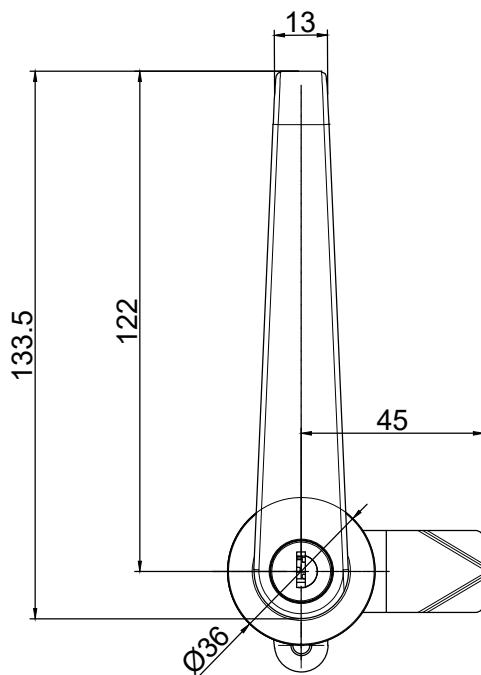
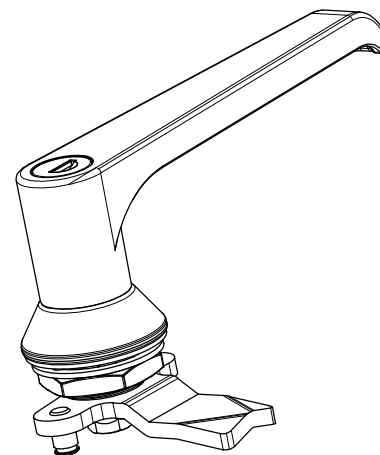


成品图

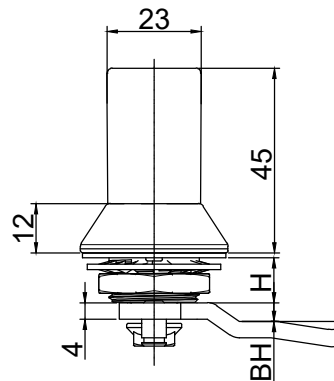

技术要求:

锁壳、锁芯、锁舌、螺母: SUS304

O圈NBR,

防水平垫EPDM;

性能参数:

IP等级: IP65;

解锁扭矩: 小于等于0.79N/M;

极限载荷: 700N;

固定螺丝扭矩: 小于等于9N/M;

固定螺母扭矩: 不大于19N/m;

门板厚度: Ts=1-5mm;

功能:

解锁后旋转90度开门。

	签 名		日 期	图号	B-1310-2		品 名 /PART NAME												
制图	NAME		DATE	PART NO	SUS304			执手锁 Handle Lock											
DRAWN	YFC		----																
审核				材料															
CHKD				material															
批准				比例															
APPROVED				SCALE	1:1	版本	A0	页数	1/1										
				REV		SHEET													
 CUYUE									<table><tr><td>单位</td><td rowspan="3"></td></tr><tr><td>UNIT</td></tr><tr><td>mm</td></tr><tr><td colspan="2">未 注 公 差</td></tr><tr><td colspan="2">0-5±0.1; >5-15±0.15</td></tr><tr><td colspan="2">>15-30±0.2;>30±0.3</td></tr></table>	单位		UNIT	mm	未 注 公 差		0-5±0.1; >5-15±0.15		>15-30±0.2;>30±0.3	
单位																			
UNIT																			
mm																			
未 注 公 差																			
0-5±0.1; >5-15±0.15																			
>15-30±0.2;>30±0.3																			
温州促越锁具科技有限公司																			
Wenzhou Cuyue Locks Technology Co., LTD.																			